



Continuous Belt Conveyor



- Powerful 3/8 HP Motor with Variable Frequency Drive
- Belt Widths: 4" (10.16 cm) min. to 36" (91.44 cm) max. in 2" (5.08 cm) increments
- Conveyor Lengths: 2' (60.96 cm) min. to 12' (365.76 cm) max.
- Max. Conveyor Load Capacity: Up to 150 Lbs. (56 kg)
- Standard Emergency Stop
- Available in a Wide Variety of Belt Materials
- Standard Clear Anodized Extruded Aluminum Side Plates
- Standard Locking Casters and Leveling Feet
- Standard Adjustable Guide Rails
- Standard Stainless Steel Frame and Applicator Supports

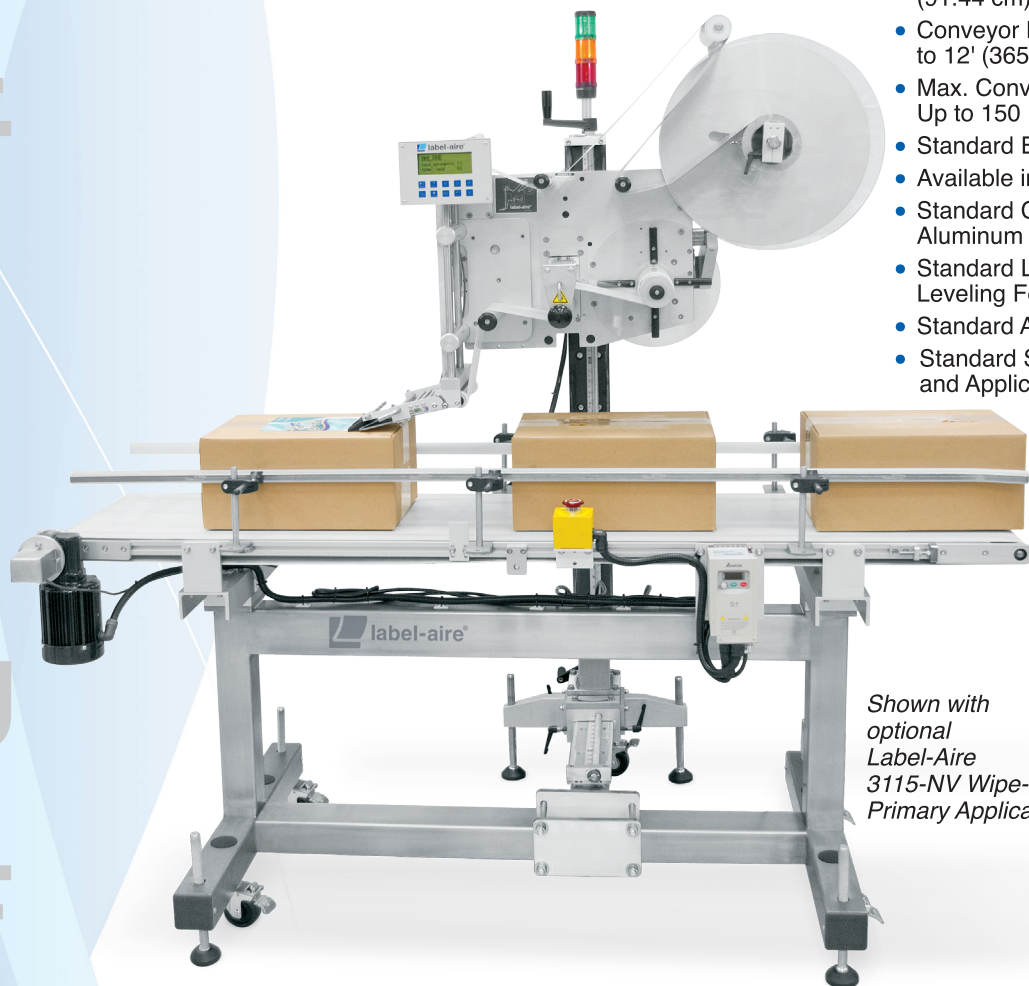

Optional FDA High Friction Belt



3/8 HP Motor

Shown with optional Label-Aire 3115-NV Wipe-On Primary Applicator.

Continuous Belt Conveyor

Accessories

Our rugged new continuous friction belt conveyor line is designed to add versatility to your Label-Aire applicator while fitting perfectly into your existing production line. The Label-Aire Continuous Belt Conveyor features a powerful yet efficient 3/8 HP motor that can move

your product at speeds up to 125 feet (38.1 m) per minute. Belt widths range from 4" (10.16 cm) to 36" (91.44 cm) max. with conveyor lengths from 2 feet (60.96 cm) to 12 feet (365.76 cm). Like all Label-Aire products, our Continuous Belt Conveyor is built to meticulous quality standards and designed to withstand the most demanding operation.



Headquarters
550 Burning Tree Road
Fullerton, CA 92833 USA

o 714.449.5105
f 714.526.0300
e info@label-aire.com
w www.label-aire.com

Europe
Sjællandsvej 27A
DK-9500 Hobro, Denmark

o +45.9657.0063
f +45.9657.0064
e info@label-aire.com
w www.label-aire.com

Asia
No. 10, Lane 228, Taisi S. Road
Longjing Township
Taichung County 434, Taiwan

o +886.4.2395.5684
f +886.4.2395.8007
e info@label-aire.com
w www.label-aire.com

Have a Label-Aire Authorized Distributor contact you. Visit www.label-aire.com.



Distributed by:

