

High-performance labeling for rotary machines

Fast, precise, compact

Even with its tiny footprint, the HERMA 500 Rotary is acknowledged for its ability to apply tens of thousands of labels an hour with supreme precision. This innovative high-performance applicator is compatible with most every rotary machine. Thanks to its compact design and built-in control – with optional real-time interfaces for integration in the machine control – the HERMA 500 Rotary is a perfect partner for rotary machines in every respect.



Offering a maximum labeling speed of 150 m/min, each applicator gives you an output of up to 60,000 labels an hour. Speed synchronization is automatic, and accurate adjustment of the height and inclination angle.

The HERMA 500 Rotary is the ideal labeling solution for your rotary machines.



Benefits at a glance

- High-performance rotary applicator for labeling bottled water, food and personal care products etc.
- Powerful HERMA 500 applicator with its top speed of 200 m/min and integrated control with convenient adjustment of all parameters via the integrated touchscreen
- Automatic speed synchronization
- Compact design for up to six applicators per station
- Adjustable height and inclination angle
- Internal and external low-label and end-of-reel checks
- Built-in control and interfaces for integration in higher-level controls

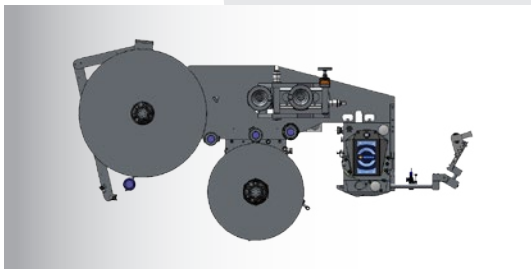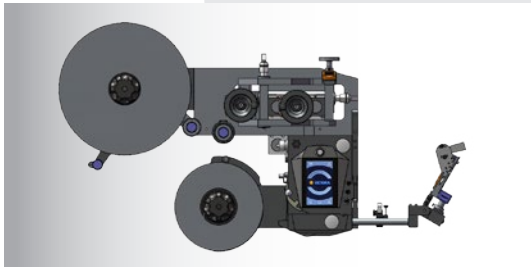

Basic 300 / Basic 300 Plus / Basic 400 Plus


- Up to 45 m/min or 16,500 labels per hour
- Mechanical unwinder for reel diameter 300 / 400 mm
- Height adjustment of HERMA 500 with adjusting bar
- Optional height and inclination angle adjustment with digital position indicator

Standard 1

- Up to 70 m/min or 27,000 labels per hour
- Motorized unwinder for reel diameter up to 400 mm
- Height and inclination angle adjustment with digital position indicator, optional trapezoidal thread spindle


Standard 2

- Up to 70 m/min or 27,000 labels per hour with two unwinders for faster changes
- Motorized unwinder for reel diameter up to 400 mm
- Height and inclination angle adjustment with trapezoidal thread spindle and digital position indicator

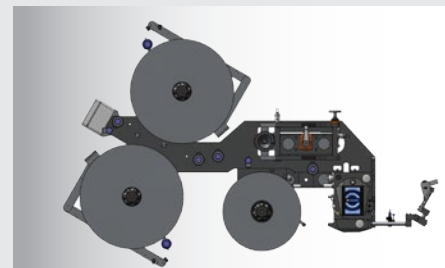

High-Speed

- Up to 150 m/min or 60,000 labels per hour with loop unit
- Motorized unwinder for reel diameter up to 400 mm
- Height and inclination angle adjustment with trapezoidal thread spindle and digital position indicator

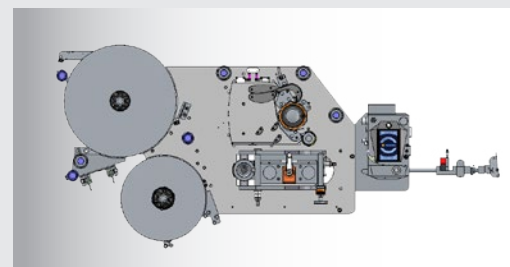

HERMA 500 Rotary video

HERMA GmbH
Labeling Machines Division

Heinrich-Hermann-Straße 14
D-70794 Filderstadt

Tel. +49 (0) 711 / 7702-2012

www.herma.com/machines
machines@herma.com